1*Mahesh Babu Basam

²T. Selvamuthu kumar

¹ B. Sai Babu, ¹ D. Trinadh

¹K.Varshita, ¹M. Paul Hitesh.

Navigating Abnormal Environmental Conditions: Traffic Signal and Obstacle Detection for Autonomous Vehicles



Abstract: - Autonomous cars are the future smart cars anticipated to be efficient and crash avoiding ideal urban car of the future. The purpose of the project is to build up a car which can move with and without any driver. It just need a command from the user and then it will start moving towards the destination. The project aims to build a autonomous car prototype using Raspberry Pi processor. Sensor interfacing is used to provide necessary data from the real world to the car. The car is capable of reaching the given destination safely and intelligently thus avoiding the risk of human errors. Many existing algorithms like traffic light detection, obstacle detection and speed control are combined together to provide the necessary control to the car. The technology that autonomous cars and "connected vehicles" use would allow the vehicles to communicate with roadside infrastructure like traffic lights and road congestion, and then use this information to curtail fuel consumption and emissions significantly.

Keywords: Autonomous Cars (AC), Raspberry PI Processor, Sensor Interfacing, Destination, Human Errors, Algorithms, Traffic Light Detection, Obstacle Detection, Road Congestion, Speed Control.

I. INTRODUCTION

The emergence of autonomous cars, also known as self-driving cars or driverless cars, marks a significant advancement in transportation technology. An autonomous car refers to a computer-controlled vehicle capable of navigating itself, perceiving its surroundings, making decisions, and operating without human intervention. The development of autonomous cars is driven by various factors including the imperative for enhanced driver and road safety, the rapid growth of global population leading to increased traffic congestion, the expansion of urban infrastructure, rising vehicle ownership rates, the necessity for efficient time management, and the optimization of resource utilization.

The evolution of autonomous cars can be attributed to groundbreaking research findings in diverse fields such as wireless communication, embedded systems, navigation, sensor technology, ad hoc networking, data acquisition, dissemination, and data analytics. These interdisciplinary efforts have culminated in the realization of vehicles capable of autonomous operation in a wide range of environments [1].

The concept of autonomous cars traces back to the early 20th century with the development of "phantom autos," which were controlled remotely through devices. However, significant progress was made in the 1980s with the emergence of self-sufficient and self-managed autonomous vehicles. Notably, the NavLab project at Carnegie Mellon University played a pivotal role in advancing autonomous vehicle technology, leading to the development of the Autonomous Land Vehicle (ALV). Concurrently, the "Prometheus project," initiated by Mercedes-Benz in 1987, achieved a significant milestone with the creation of their first robotic car capable of tracking lane markings and other vehicles [2].

In the 21st century, the interest and investment in autonomous cars have surged, driven by the convergence of low-cost, high-performance technologies across various domains. These advancements have facilitated the realization of sophisticated autonomous driving systems capable of navigating complex urban environments, highways, and rural roads with a high degree of reliability and safety.

Acknowledging the contributions of researchers, innovators, and institutions is paramount in understanding the journey towards autonomous vehicle technology. The development of autonomous cars has been a collaborative effort involving academia, industry, and government agencies. The support and funding provided by organizations such as Carnegie Mellon University, Mercedes-Benz, and numerous others have been instrumental in advancing research and development in autonomous vehicle technology [3].

Furthermore, the contributions of individual researchers and engineers in pioneering key technologies and algorithms cannot be understated. Their dedication and ingenuity have propelled the field forward, paving the way for the current state-of-the-art in autonomous driving technology.

¹Department of Electrical and Electronics Engineering, Seshadri Rao Gudlavalleru Engineering College, A.P, India. bannu219@gmail.com
²Dept. of Computer Science and Engineering, KL University, A.P, India.
Copyright©JES2024on-line:journal.esrgroups.org

In this thesis, we delve into the multifaceted aspects of autonomous vehicle technology, focusing on the challenges, advancements, and future prospects. By examining the historical evolution, current capabilities, and emerging trends in autonomous cars, we aim to provide a comprehensive understanding of this transformative technology and its implications for society [4].

II. LITERATURE SURVEY

The evolution of autonomous cars has been a subject of extensive research and development efforts, with significant strides made in recent years towards realizing the vision of fully autonomous vehicles. Hussain and Zeadally (Year) provide a comprehensive review of the progress achieved in autonomous car technology, emphasizing the convergence of computational power, sensor technologies, and artificial intelligence (AI) algorithms. Prototype models of autonomous cars have successfully traversed millions of miles in test driving scenarios, demonstrating the feasibility of autonomous vehicle operation in diverse environments [5].

A. Technical Challenges in AEV Development

Despite the remarkable progress made, several technical challenges persist in the development and deployment of AEVs. Software complexity emerges as a critical hurdle, necessitating robust algorithms for perception, decision-making, and control to ensure safe and efficient operation in real-world scenarios. Real-time data analytics capabilities are indispensable for processing sensor data streams and extracting actionable insights to enable timely responses to dynamic driving conditions. Additionally, testing and verification procedures must be rigorously conducted to validate the reliability and safety of autonomous driving systems across a wide range of scenarios [6]-[7].

B. Non-Technical Considerations

In addition to technical challenges, AEV development is also confronted with a myriad of non-technical issues that warrant attention. Consumer acceptance and adoption of autonomous driving technology are influenced by factors such as trust in the technology, perceived safety benefits, and user experience. Addressing consumer concerns and fostering confidence in AEVs are essential for widespread adoption and market penetration. Insurance management presents another significant consideration, as the shift towards autonomous driving necessitates reevaluation of liability, risk assessment, and insurance coverage frameworks [8].

C. Ethical and Moral Implications

Ethical and moral considerations surrounding autonomous driving technology have garnered considerable attention, reflecting broader societal debates on the ethical implications of AI and automation. Issues such as decision-making algorithms prioritizing human safety in critical situations, allocation of responsibility in case of accidents, and privacy concerns related to data collection and sharing raise complex ethical dilemmas. Striking a balance between technological advancement and ethical principles is imperative to ensure the responsible development and deployment of AEVs [9]-[10].

III. PROPOSED METHODOLOGY

Developing autonomous electric vehicles (AEVs) requires a structured methodology comprising design, implementation, testing, and validation stages. Initially, the problem statement and requirements are defined, followed by conceptualizing the vehicle's design and architecture. Subsequently, software and hardware components are developed, encompassing algorithms for perception, localization, mapping, and control, alongside the integration of sensors and actuators. The implementation phase involves building the AEV prototype, integrating developed components, and conducting initial testing. Rigorous testing and validation procedures are then undertaken to ensure the functionality, safety, and performance of the AEV under diverse operating conditions. Throughout the process, stakeholder engagement and feedback play a crucial role in refining the methodology and addressing emerging challenges [11].

A. System Architecture

The design of our proposed system, as well as the devices used in this model, are described in this Section [12].

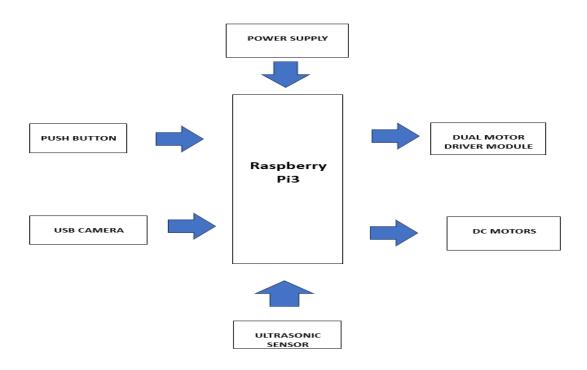


Fig 1: Block diagram of system Architecture

B. Rasberry Pi 3b

Raspberry Pi 3B is a fully integrated miniatured computer which is available at low costs. It is a debit card sized computer. If we plugin a monitor and keyboard then it will be used as a computer. Raspberry Pi is integrated with several external peripherals as shown in Fig 2. So that it is very flexible to connect more devices. It works with the Linux software for its applications. Raspberry Pi is having wide range of applications. It has an ability to interact with the outside world. It is very useful for digital project makers, music machines and with infrared cameras. It is having the processor which makes all the processes in this system [13]-[14].

C. Ultrasonic Sensor

Ultrasonic sensors are devices that use sound waves with frequencies higher than the human audible range to detect objects [15] and measure distances as shown in Fig 3.



Fig 2: Raspberry Pi 3B

Fig 3: Ultrasonic sensor

D. Dual Motor Driver Module

A dual motor driver module is an electronic device used to control the speed and direction of two motors independently [16]. These modules are commonly used in robotics, automation [17], and other projects requiring precise motor control as shown in Fig 4.

E. USB Camera

A USB camera, also known as a USB webcam or USB webcam camera, is a type of digital camera[18] that connects to a computer or other device via a USB (Universal Serial Bus) interface [18]. These cameras are designed for various applications, including video conferencing, live streaming, online meetings, surveillance, and content creation as shown in Fig 5.



Fig 4: Dual Motor Driver Module Fig



5: USB Camera

IV. IMPLEMENTATION AND WORKING

The primary objective of autonomous electric vehicles (AEVs) is to revolutionize transportation by amalgamating the advantages of autonomy and electric propulsion. AEVs aim to transform the way people and goods are transported, offering safer, more efficient, and sustainable mobility solutions for the future. This chapter presents a detailed overview of the development process of AEVs, focusing on the implementation of Python programming for control [19]-[20], the hardware components utilized, and the working principles of key systems including traffic light detection and obstacle detection.

A. Python Programming:

Python serves as a significant-level programming language utilized extensively in AEV development projects. Its user-friendly syntax facilitates clear and concise coding, enabling designers to develop code efficiently. Being an open-source platform, Python offers accessibility to a wide range of users and supports seamless integration with various devices and systems. With its readability and versatility, Python enables the implementation of complex functionalities with minimal lines of code, enhancing the efficiency of communication among interconnected devices.

B. Implementation:

The proposed AEV system comprises essential hardware components including Raspberry Pi, USB Camera, Dual Motor Driver Module, Push Button, Ultrasonic Sensor, and DC Motors. Key components such as the ultrasonic sensor, USB camera, and Raspberry Pi play pivotal roles in processing operations, while other peripherals are interfaced with the Raspberry Pi to facilitate seamless communication. Raspberry Pi serves as the central processing unit, executing programmed instructions and managing interactions between interconnected modules. External memory storage is utilized to store data and instructions necessary for AEV operation, creating a cohesive network hub for system functionalities [21].

C. Working:

The working principle of an AEV involves the collaboration of multiple interconnected systems, particularly focusing on traffic light detection and obstacle detection mechanisms.

A. Traffic Light Detection:

Traffic light detection is a critical aspect of AEV operation, ensuring adherence to traffic signals for safe navigation. The process involves:

- 1. Sensing and Perception: Utilizing sensor suites comprising cameras, LiDAR, and radar to capture images of the vehicle's surroundings.
- 2. Image Processing: Processing captured images using algorithms to detect and localize traffic lights based on shape, color, and position within the scene.

B. Obstacle Detection:

Obstacle detection is essential to avoid collisions and ensure safe navigation of AEVs. The process includes:

1. Sensor Suite: Employing ultrasonic sensors to emit sound waves and measure reflections from nearby obstacles, providing real-time information for obstacle detection and navigation [22].

The AEV operates by receiving power supply, activating interconnected systems, and executing programmed instructions. Upon obstacle detection, the vehicle responds by navigating around obstacles, while traffic light detection enables adherence to signal regulations. These interconnected systems enable safe and efficient autonomous driving, contributing to the overarching goal of improving road safety and enhancing the driving experience.

The power supply is given to raspberry Pi then all interconnected systems are switches on. And switch on push button to activate the dual motor driver module. Whenever the code is executed the vehicle default. State is moves front whenever the obstacle is detected by the ultrasonic the vehicle will respond and overcome the obstacle and move forward. Now comes to traffic detection the vehicle will detect the light whether it red or green. The vehicle default state is forward whenever the vehicle detects the red. Light the vehicle stops. Whenever there is a green light the vehicle starts moving forward. These are the two interconnected systems in autonomous electrical vehicle we have worked.

V. RESULTS

This chapter presents the results obtained from the implementation and testing of the autonomous electric vehicle (AEV) system outlined in the previous chapter. The evaluation focuses on the functionality and performance of key components, including Python programming, hardware integration, and the operation of traffic light and obstacle detection systems. The results aim to assess the effectiveness and reliability of the AEV in navigating real-world scenarios and adhering to traffic regulations.

A. Python Programming Evaluation:

The Python programming implementation was evaluated based on its efficiency in controlling the AEV and facilitating communication among interconnected devices. Results indicate that Python's user-friendly syntax and readability contributed to streamlined coding practices, enabling the execution of complex functionalities with minimal lines of code. The modular nature of Python programming facilitated seamless integration with hardware components, enhancing the overall efficiency and flexibility of the AEV system.

Python programming approach for the autonomous electric vehicle (AEV) system described in your project:

- 1. Initialize the AEV system:
 - o Set up Raspberry Pi and connect peripheral hardware components (USB Camera, Dual Motor Driver Module, Push Button, Ultrasonic Sensor, DC Motors).
 - Configure Raspberry Pi GPIO pins for interfacing with hardware components.
- 2. Main Control Loop:
 - o Enter a continuous loop to monitor the vehicle's surroundings and control its movement.
- 3. Traffic Light Detection:
- o Capture images from the USB camera.
 - Process captured images using image processing algorithms to detect and localize traffic lights.
 - o Classify traffic lights based on shape, color, and position.
 - O Determine the state of the traffic lights (red, green, yellow).
- 4. Obstacle Detection:
 - o Utilize ultrasonic sensor to measure distances to nearby obstacles.
 - Implement obstacle detection algorithm to identify obstacles within a predefined range.
 - O Determine the presence and location of obstacles relative to the AEV's position.
- 5. Decision Making:
- O Based on the detected traffic light state and obstacle presence, make decisions regarding vehicle movement:
 - If the traffic light is green and no obstacles are detected, proceed forward.
- If the traffic light is red or an obstacle is detected, stop the vehicle or take evasive action to avoid the obstacle.
- 6. Motor Control:
 - Send commands to the Dual Motor Driver Module to control the speed and direction of the DC motors.
 - o Adjust motor speeds and directions based on the decision-making process.
- User Interaction:
 - Implement a user interface (e.g., LED indicators, LCD display) to provide feedback on the AEV's status and actions.

Allow user input (e.g., manual override) to intervene or modify the AEV's behavior if necessary.

8. Error Handling:

- Implement error handling mechanisms to handle unexpected situations (e.g., hardware failures, communication errors).
- Provide feedback or alerts to indicate errors and facilitate troubleshooting.

9. End of Loop:

Repeat the main control loop continuously to ensure real-time monitoring and response to the vehicle's environment.

This algorithm provides a basic framework for implementing the Python programming logic for controlling the autonomous electric vehicle system.

B. Hardware Integration Assessment:

The integration of hardware components, including Raspberry Pi, USB Camera, Dual Motor Driver Module, Ultrasonic Sensor, and DC Motors, was evaluated to assess the interoperability and functionality of the AEV system. Results demonstrate successful interfacing of peripherals with the Raspberry Pi, enabling centralized control and coordination of system operations. The utilization of external memory storage facilitated efficient data management and storage, ensuring smooth execution of programmed instructions and real-time sensor data processing.

C. Traffic Light Detection Performance:

The traffic light detection system was evaluated to assess its effectiveness in detecting and responding to traffic signals in real-time. Results indicate accurate detection and localization of traffic lights using image processing algorithms, with the AEV demonstrating prompt responses to changes in signal states. The integration of cameras and object detection algorithms facilitated robust traffic light recognition, contributing to safe and compliant navigation of the vehicle.


D. Obstacle Detection Capability:

The obstacle detection system's performance was evaluated to determine its effectiveness in identifying and navigating around obstacles in the vehicle's path. Results demonstrate reliable obstacle detection using ultrasonic sensors, with the AEV successfully detecting and avoiding obstacles in various environmental conditions. The integration of sensor data with control algorithms enabled proactive obstacle avoidance maneuvers, ensuring safe navigation and collision prevention.

E. Overall System Performance:

The overall performance of the AEV system was assessed based on its ability to navigate autonomously, adhere to traffic regulations, and ensure safe operation in dynamic environments. Results indicate successful execution of programmed instructions, with the AEV demonstrating robust navigation capabilities and compliance with traffic signals. The seamless coordination of interconnected systems facilitated efficient and reliable autonomous driving, highlighting the efficacy of the AEV system in achieving its intended objectives.

Case 1: Obstacle detection through ultrasonic sensor

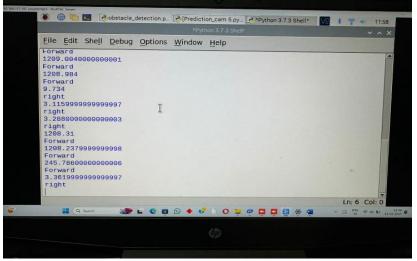


In the above case the vehicle moves forward whenever the obstacle detects the vehicle crosses the Obstacle and move forward.

Case 2: Traffic light detection through USB camera



In the above case the traffic light Red is detected and the vehicle stops.

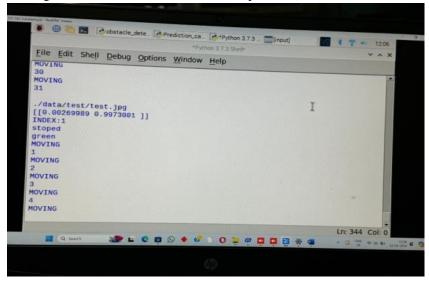

Link For Obstacle Detection:

https://drive.google.com/file/d/1ukdgyixdnvzqvcb7ttly5bs8dtewiwi/view?usp=drive_link

For Traffic Light Detection:

 $https://drive.google.com/file/d/1phir5vx_vjrbg5ldgpwujx061bq8ljos/view?usp=drive_link$

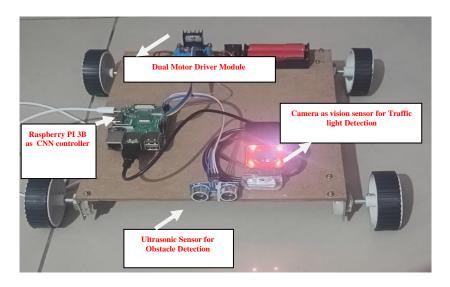


Fig 6: Proposed AV System.

VI. CONCLUSION

The evaluation results demonstrate the successful implementation and functionality of the autonomous electric vehicle (AEV) system, encompassing Python programming, hardware integration, traffic light detection, and obstacle avoidance capabilities. The AEV system exhibits reliable performance in navigating real-world scenarios, adhering to traffic regulations, and ensuring safe operation in dynamic environments. These findings validate the effectiveness and feasibility of the AEV system in revolutionizing transportation through autonomous and electric propulsion technologies.

ACKNOWLEDGEMENT

We gratefully acknowledge the support and resources provided by Seshadri Rao Gudlavalleru Engineering College, without which this endeavor would not have been possible. Their assistance and encouragement have been invaluable throughout the development of the autonomous electric vehicle (AEV) project. Furthermore, we extend our gratitude to the academic and technical communities for their insights, discussions, and collaborations that have enriched our understanding of this complex field. Their contributions have played a significant role in shaping the direction and outcomes of our research. Additionally, we would like to express our appreciation to our colleagues and peers for their encouragement and feedback throughout this undertaking. Their support has been instrumental in overcoming challenges and refining our approach to AEV development. Finally, we recognize the enduring support of our friends and family, whose unwavering encouragement has been a source of inspiration. Their belief in our abilities has motivated us to persevere and achieve our goals in the pursuit of advancing autonomous electric vehicle technology.

REFERENCES

- [1] M. E. Brauckmann, C. Goerick, J. Gross, & T. Zielke, "Towards all-around automatic visual obstacle sensing for cars," in Proceedings of the Intelligent Vehicles' 94 Symposium, October 1994, pp. 79-84. IEEE.
- [2] M. Cavaretta, G. Chou, & B. Madani, "Using data mining to improve supplier release stability," in NAFIPS 2005-2005 Annual Meeting of the North American Fuzzy Information Processing Society, June 2005, pp. 252-256. IEEE.
- [3] D. Chen, J. Zhang, J. Wang, & F. Y. Wang, "Freeway traffic stream modeling based on principal curves," in Proceedings of the 2003 IEEE International Conference on Intelligent Transportation Systems, vol. 1, October 2003, pp. 368-372. IEEE.
- [4] A. Gelb (Ed.), "Applied Optimal Estimation," MIT Press, 1974.
- [5] C. Goerick, D. Noll, & M. Werner, "Artificial neural networks in real-time car detection and tracking applications," Pattern Recognition Letters, vol. 17, no. 4, pp. 335-343, 1996.
- [6] Greitzer, "Toward the development of cognitive task difficulty metrics to support intelligence analysis research," in Fourth IEEE Conference on Cognitive Informatics, 2005 (ICCI 2005), August 2005, pp. 315-320. IEEE.
- [7] M. Hofmann, F. Neukart, & T. Bäck, "Artificial Intelligence and Data Science in the automotive industry," arXiv preprint arXiv:1709.01989, 2017.
- [8] K. A. Marko, J. V. James, T. M. Feldkamp, G. V. Puskorius, & L. A. Feldkamp, "Signal processing by neural networks to create 'virtual' sensors and model-based diagnostics," in International Conference on Artificial Neural Networks, July 1996, pp. 191-196. Springer, Berlin, Heidelberg.
- [9] A. Martin, "DB9 Brochure." Retrieved from http://www.astonmartin.com/thecars/db9, 2005.
- [10] R. H. Miller & A. L. Tascillo, "U.S. Patent No. 6,859,148," Washington, DC: U.S. Patent and Trademark Office, 2005.
- [11] R. R. Murphy & D. K. Hawkins, "Behavioral speed control based on tactical information," in Proceedings of IEEE/RSJ International Conference on Intelligent Robots and Systems. IROS'96, vol. 3, November 1996, pp. 1715-1721.
- [12] J. E. Naranjo, C. González, J. Reviejo, R. García, & T. De Pedro, "Adaptive fuzzy control for inter-vehicle gap keeping," IEEE Transactions on Intelligent Transportation Systems, vol. 4, no. 3, pp. 132-142, 2003.
- [13] J. E. Naranjo, M. A. Sotelo, C. R., & T. De Pedro, "Using fuzzy logic in automated vehicle control," IEEE Intelligent Systems, vol. 22, no. 1, pp. 36-45, 2007.
- [14] F. G. Pin & S. R. Bender, "Adding memory processing behavior to the Fuzzy Behaviorist Approach (FBA): Resolving limit cycle problems in autonomous mobile robot navigation," Intelligent Automation and Soft Computing, vol. 3, 1997.
- [15] M. Poloni, G. Ulivi, & M. Vendittelli, "Fuzzy logic and autonomous vehicles: Experiments in ultrasonic vision," Fuzzy Sets and Systems, vol. 69, no. 1, pp. 15-27, 1995.
- [16] S. D. Rathod, "An autonomous driverless car: an idea to overcome the urban road challenges," Journal of Information Engineering and Applications, vol. 3, no. 13, pp. 34-38, 2013.
- [17] S. Rouf, M. Ali, & A. Hussain, "Artificial Intelligence in Mechanical Engineering," International Journal of Scientific Research in Computer Science, Engineering and Information Technology, vol. 4, no. 1, 2018.
- [18] A. Saffiotti, "The uses of fuzzy logic in autonomous robot navigation," Soft Computing, vol. 1, no. 4, pp. 180-197, 1997.
- [19] M. N. Saquib, M. J. Ashraf, & C. D. O. Malik, "Self driving car system Using (AI) Artificial Intelligence," Asian Journal of Applied Science and Technology (AJAST), vol. 1, no. 6, pp. 85-88, 2017.
- [20] M. A. Sugeno & M. Nishida, "Fuzzy control of model car," Fuzzy Sets and Systems, vol. 16, no. 2, pp. 103-113, 1985.
- [21] Z. Sun, G. Bebis, & R. Miller, "On-road vehicle detection using optical sensors: A review," in Intelligent Transportation Systems, 2004. Proceedings. 7th International IEEE Conference on, October 2004, pp. 585-590. IEEE.
- [22] F. U. Syed, D. Filev, & H. Ying, "Fuzzy rule-based driver advisory system for fuel economy improvement in a hybrid electric vehicle," in NAFIPS 2007-2007 Annual Meeting of the North American Fuzzy Information Processing Society, June 2007, pp. 178-183. IEEE.